
日宏机械
RHONG MACHINERY

重型粉碎机系列
Heavy duty granulator

重型粉碎机RG-56E
Heavy duty granulator



重型粉碎机RG-66S
Heavy duty granulator



重型粉碎机适用于破碎不同种类的管材、型材、板材,较厚的料头、料件,包装材料、容器、电缆等塑胶次品、废品,提高了塑料利用率。

Description:

Heavy-duty granulator is suitable for crushing different kinds of heavy wall fittings,pipes, profiles,sheet,blocks,high impact applications,thicker materail head,plastic container,package material and cable etc.

宁波北仑日宏机械制造有限公司
Ningbo Beilun Rhong Machinery Manufacturing Co.,Ltd

地址：浙江.宁波.北仑.小港街道.东岗碶.
Donggangqi,Xiaogang Subdistrict,Beilun,
Ningbo,Zhejiang Province,China.
Tel:+86-574-86236922
Fax:+86-574-26855258
Mobile& WhatsApp:+86-15258354994
E-mail: sales@plastics-machinery-equipment.com

Wechat

更多咨询请访问：
www.plastics-machinery-equipment.com

RG-66S
重型粉碎机
Heavy duty granulator



重型粉碎机RG-56E
Heavy duty granulator


重型粉碎机RG-66S
Heavy duty granulator

Heavy duty granulator
重型粉碎机系列

日宏机械 RHONG MACHINERY

机器特点
Machine features

进料斗厚板制作，强度高。
Feeding hopper is made of high hardness steel.

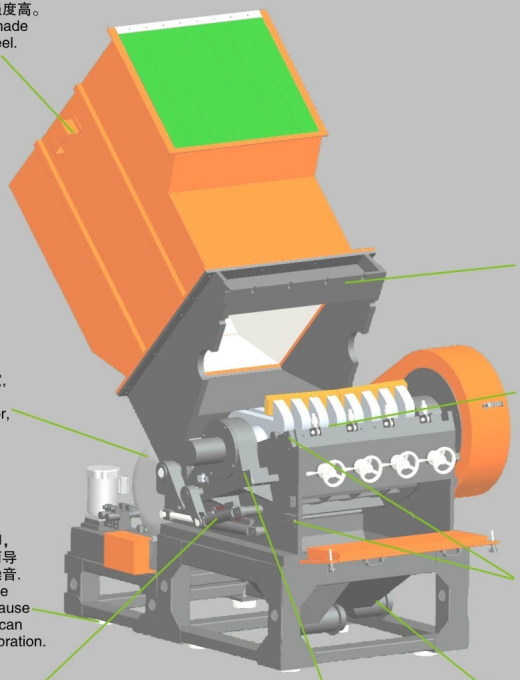

粉碎室采用中部半开结构,动定刀的更换更简单易行.
Half–open structure in the middle of cutting chamber,better for replacing rotating and fixed blades.

品牌电机，质量稳定，使用寿命长。
Famous brand motor, stable quality,long time using

定刀设计在粉碎室上平面，更方便拆卸、更换、清扫。
Fixed blades installed on the upper plane of the crushing chamber,better for disassemble,replace and clean.

配置了可调节避震脚，减小了因地面不平而导致的震动与产生的噪音.
Equip with adjustable shock absorber because of uneven ground，can reduce noise and vibration.

进料斗与筛网架设有安全装置，保证在打开时，刀具停止运转。
Safety switch for feeding hopper and screen bed,to make sure rotor stop running absolutely when opening the feeding hopper or screen bed.

配备液压起落，开关进料斗与筛网架更轻松。
Hydraulic device to open and close feeding hopper with upside cutting chamber and screen bed easily.

轴承安装在机体外,粉尘不易侵入，散热良好,保养及维护简便易行。
Outside bearing design,hard to enter into dust,better cooling efficiency，maintaince.

标配风机送料系统，提高生产效率,而且能将粉碎室内的物料与热量吸走,有效的降低粉碎室温度。
Standard allocation with blower conveying system，Increase production capacity,suck material and absorb heat to reduce the cutting chamber temperature.



RG–66S

片刀型 Paddle blades type

刀具采用"V形"切割技术，切削时物料从两侧向中心滑动，避免材料与机器侧壁的摩擦与堵塞.
V type arrangement design,during crushing process? material will be crushed in claw blades center point, avoid friction and blockage between material and side wall.




独立电控箱设计，客户可以按照需求放置，方便灵活。内置电机过载荷保护器，保护电机安全。
Independent control box design,easy to move the correct place according to customer requirement Overload device to protect motor.

技术参数
technical parameter

日宏机械 RHONG MACHINERY


重型粉碎机安装示意图
----风机送料

Heavy duty granulator
Installation diagram
----blower system

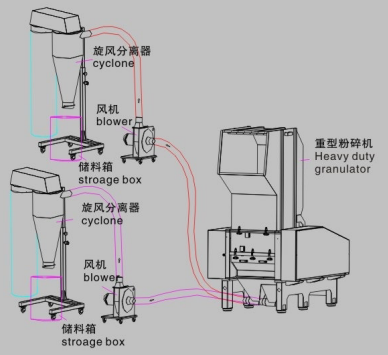

重型粉碎机安装示意图
---风机送料+除尘装置

Heavy duty granulator
Installation diagram
----blower system
+dedusting system

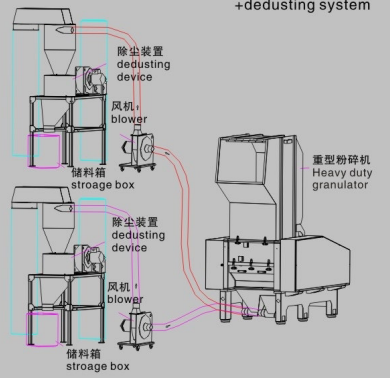

规格表Specifications

机型Model		RG–66100S	RG–66120S	RG–66140S
电机功率 Power	kw	75	90	110
主轴转速 Rotor speed	rpm	450	450	450
活动刀 Rotating blades	PCS	6	6	6
固定刀 Fixed blades	PCS	4	4	4
筛网孔径 Screen diameter	mm	ϕ12	ϕ12	ϕ12
粉碎室尺寸 Cutting chamber size	mm	870X1000	870X1200	870X1400
粉碎能力 Output	kg/h	1500～2500	1800～2800	2000～3000
粉碎时噪音 Noise	dB(A)	100～120	100～120	100～120
进料斗液压起落 Hydraulic controller for feeding–hopper		●	●	●
筛网架液压起落 Hydraulic controller for screen bed		●	●	●
风机送料系统 Blower conveying system		4KWX2 ●	4KWX2 ●	5.5KWX2 ●
人工接料箱 Material box		○	○	○
		○	○	○
重量 Weight	kg	4960	6200	7800
外形尺寸(L×W×H) External size	mm	2290X1980X3280	2290X2140X3280	2290X2340X3280

产品规格若有变更,恕不另行通知.
Please excuse for not note if some specifications of products are changed.

Note 注：

1) "●"为标配，"○"为选购。
"●"is standard allocation, "○"is selection purchase.
2) 标配为片刀型结构。
"V"shaped paddle blades type is standard allocation,
3) 最大粉碎量取决于筛网孔径及粉碎材料等因素。
The max. shredding quantity depend on the mesh hole diameter and shredding material quality.
4) 机器电压规格为3Φ,380V,50Hz。
The machine voltage specification is 3Φ,380V,50Hz.
The voltage can be changed as you require.

