日宏机械
RHONG MACHINERY

# 除湿干燥系列
Dehumidifier and dryer series

RHD蜂巢除湿机
Honeycle dehumidifier



输送一体式除湿干燥机
All-in-one dehumidifier and loader



RCD箱型干燥机
Chamber dryer



RDM 料斗干燥机
Hopper dryer



RDM-U欧化干燥机
Europeanization dryer



除湿干燥系列机型主要用于对因包装、运输或者回收受潮的的塑胶原料的进行干燥，以确保塑胶产品在成型过程中的质量。根据塑料原料的种类、使用环境,以及塑胶产品成型质量所需求的干燥程度，可选用除湿干燥系列机型中的相关设备，对相应的塑胶原料进行干燥处理。

Dehumidifying & drying series are suitable for drying plastic dehumidified material causedby packing，transporation and retrieving,to ensure the quality of plastic products in themolding process.Dehumidifying & drying machines can choose the correct model according to different kinds of plastic material,different working conditions and different drying time requirement for different plastic products quality requirement.


宁波北仑日宏机械制造有限公司
Ningbo Beilun Rhong Machinery Manufacturing Co.,Ltd

地址：浙江.宁波.北仑.小港街道.东岗碶.
Donggangqi,Xiaogang Subdistrict,Beilun,
Ningbo,Zhejiang Province,China.
Tel:+86-574-86236922
Fax:+86-574-26855258
Mobile& WhatsApp:+86-15258354994
E-mail: sales@plastics-machinery-equipment.com


Wechat

更多咨询请访问：
www.plastics-machinery-equipment.com

# 箱型干燥机
Chamber dryer



RHD蜂巢除湿机机
Honeycle dehumidifier
输送一体式除湿干燥机
All-in-one dehumidifier and loader
箱型干燥机
Chamber dryer
料斗干燥机
Hopper dryer
欧化干燥机
Europeanization dryer

Dehumidifier and dryer series
除湿干燥系列

日宏机械 RHONG MACHINERY

# 机器特点
Machine features

RCD箱型干燥机适用于所有种类的聚合物材料烘干，并能同时烘干不同的材 料，非常适合于少量、多样性的原料或试模时使用，也可用于电子、电机、 电镀、烤漆、印刷等多行业相关产品的预热或干燥处理。

The RCD series of chamber dryers are used to simutaneously dry differentkinds plastics in small quantity or material for trial moulding. They can be applied in dustries of electronic engineering, electroplating, pharmacy, paint baking, printing industries and etc. for preheating or drying related products.



配置独立温度控制器，超温保护警示。
Equipped with separate temperature controller and alarm for overheat.

24小时定时装置，操作方便。
24-hour timer,easy to operate

采用P.I.D.温度控制，达到精密的均匀的烘干效果。
P.I.D temperature control so as to achieve an accurate even drying effect.

入风口、排风口采用可调式空气阀门便于调节风量。
Adjustable air valve at air inlet and outlet so as to adjust wind strength.

配置电流表,实时监测电流状况
Equipped with ammeter, real-time monitoring of electric current status.


不锈钢材料的烤盘及内胆，可防止在烘干过程中污染原料。优化设计，方便维修保养。
Stainless steel tray and liner bring no contaminat ion to material.Optimized design so as to repair and maintain easiliy.


保温密封门可保持恒定的温度并降低热量损耗。
Air tight insulating door can keep temperature constant inside and reduce energy consumption.

移动脚轮，可随时移动到所需位置
Equipped with universal casters,conveniently placed in the right place.

# 技术参数
Technical parameter

日宏机械 RHONG MACHINERY

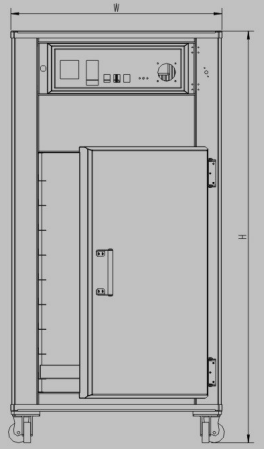

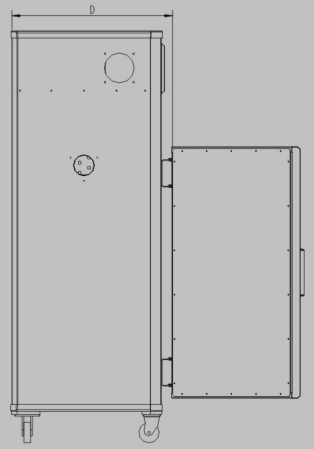
## 规格表Specifications

| 机型 | Model | | RCD-5 | RCD-9 | RCD-20 |
|---|---|---|---|---|---|
| 干燥电热 | Heat power | KW | 4 | 4.5 | 9 |
| 风车马达 | Blower power | W | 0.37 | 0.37 | 1.5 |
| 控温范围 | Temperature Range | ℃ | 250 | 250 | 250 |
| 盘架数 | Shelf Qty | plate | 5 | 9 | 20 |
| 装料量 | Loading Capa | kg | 50 | 100 | 200 |
| 内部尺寸HxWxD | internal Size(HxWxD) | mm | 580X580X500 | 880X580X500 | 1000X970X800 |
| 外部尺寸HxWxD | External Size(HxWxD) | mm | 1200X780X600 | 1500X780X650 | 1750X1210X950 |
| 重量 | Weight | kg | 126 | 168 | 380 |

产品规格若有变更,恕不另行通知。
Please excuse for not note if some specifications of products are changed.

Note 注：

1) Tray and whole dryer can be custom-made according your specifications
2) The machine voltage specification is 3Φ,380V,50Hz. The voltage can be changed as you require.

1) 可依需求定制烤盘或整机特制
2) 机器电压规格为3Φ,380V,50Hz, 可以根据要求变更